


INTERIOR

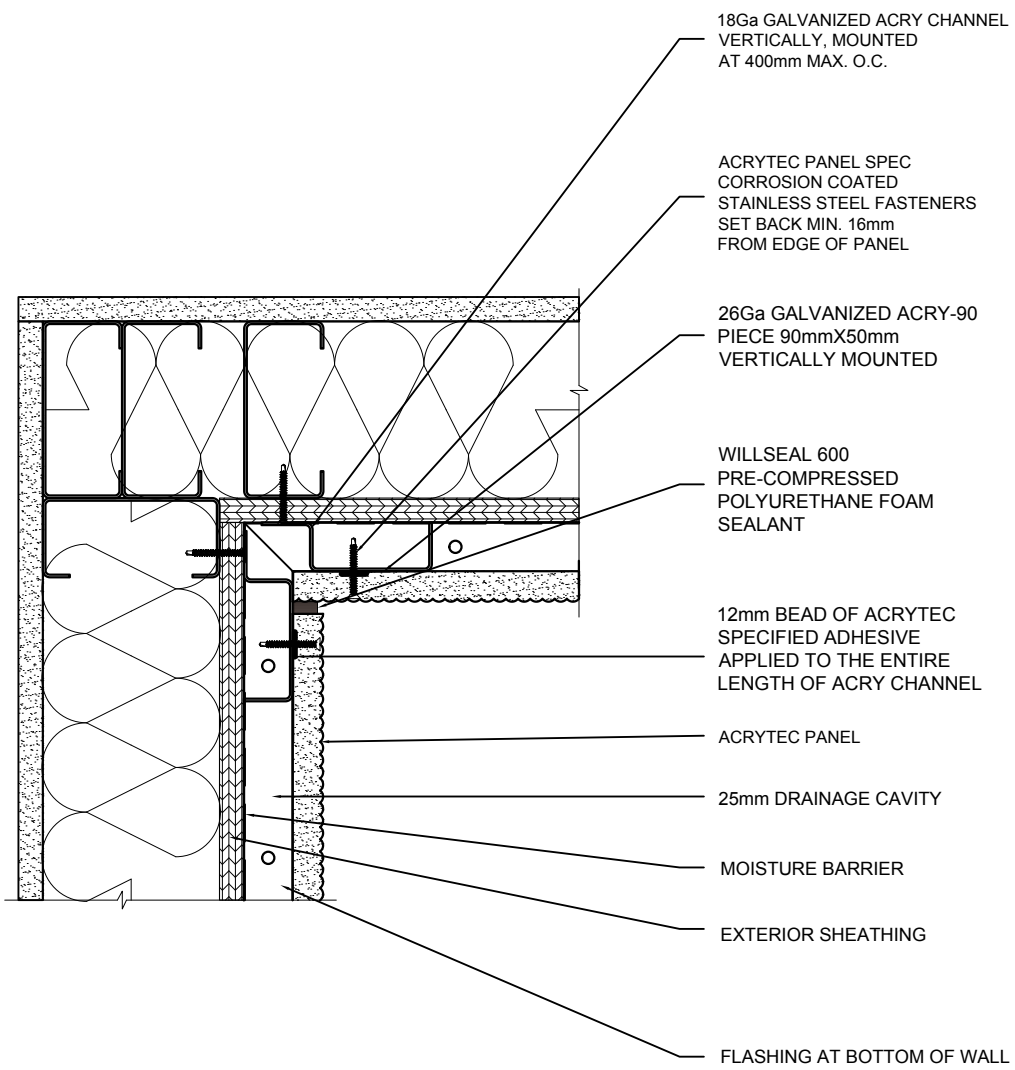

18Ga GALVANIZED ACRY CHANNEL
VERTICALLY, MOUNTED
AT 400mm MAX. O.C.

ACRYTEC PANEL SPEC
CORROSION COATED
STAINLESS STEEL FASTENERS
SET BACK MIN. 16mm
FROM EDGE OF PANEL

26Ga GALVANIZED ACRY-90
PIECE 90mmX50mm
VERTICALLY MOUNTED

WILLSEAL 600
PRE-COMPRESSED
POLYURETHANE FOAM
SEALANT

12mm BEAD OF ACRYTEC
SPECIFIED ADHESIVE
APPLIED TO THE ENTIRE
LENGTH OF ACRY CHANNEL

ACRYTEC PANEL

25mm DRAINAGE CAVITY

MOISTURE BARRIER

EXTERIOR SHEATHING

FLASHING AT BOTTOM OF WALL

 **Acrytec**
PANEL INDUSTRIES
40 Gaudaur Road, Unit 1
Woodbridge, Ontario, Canada, L4L 4S6
T: 905.326.3749 | F: 905.326.2732
Toll: 1.800.316.9430 | www.acrytecpanel.com

TITLE:
INSIDE CORNER

SCALE: N/A
DS-15