COLOUR MATCHED SEALANT AND BACKER ROD OR USE ILLMOD 600

ACRYTEC PANEL SPEC CORROSION COATED STAINLES STEEL FASTENERSSET BACK MIN. 16mm [0.625"] FROM EDGE OF PANEL **INSTALL ON ONE SIDE OF PANEL ONLY**

ACRY-BAND 26Ga GALVANIZED FLAT TRIM PIECE 64mm [2.5"] WIDE HORIZONTALLY MOUNTED AT JOINTS (TYP).

12mm [0.5"] BEAD OF ACRYTEC SPECIFIED ADHESIVE APPLY CONTINIOUSLY TO ALL ACRY CHANNEL

HORIZONTAL CHANNEL AT BOTTOM OF WALL

ACRYTEC PANEL SPEC CORROSION COATED STAINLES STEEL FASTENERS SET BACK MIN. 16mm [0.625"] FROM EDGE OF PANEL

ACRYTEC PANEL

18Ga GALVANIZED ACRY CHANNEL C/W DRAINAGE HOLES AT 100mm [4"] O.C. VERTICALLY, MOUNTED AT 400mm [15.75"] MAX. O.C.

NO ADHESIVE OR FASTENERS ON THIS SIDE OF ACRY-BAND TRIM. MUST REMAIN FREE FLOATING FOR EXPANSION OR CONTRACTION

25mm [1"] DRAINAGE CAVITY

MOISTURE BARRIER

EXTERIOR SHEATHING

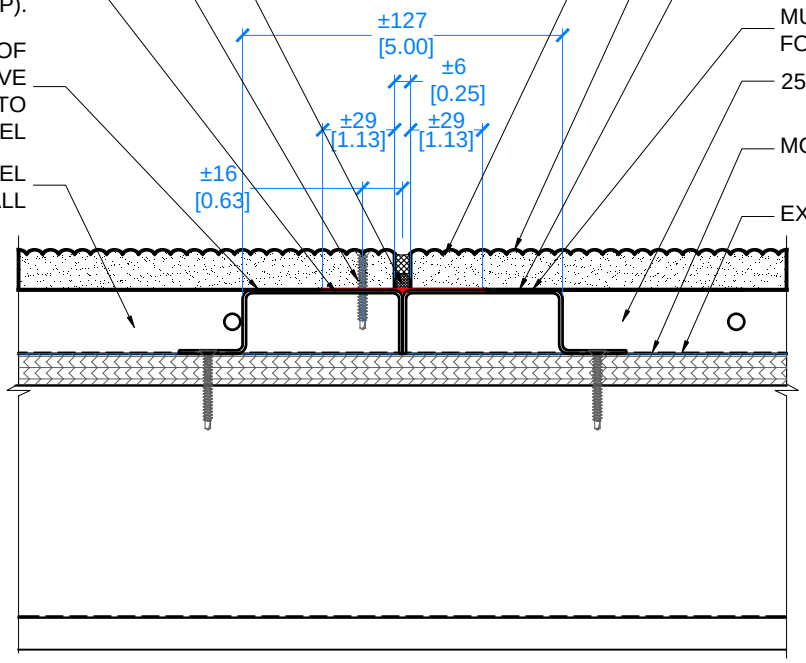

INTERIOR

Acrytec PANEL INDUSTRIES
40 Gaudaur Road, Unit 1
Woodbridge, Ontario, Canada, L4L 4S6
T: 905.326.3749 I F: 905.326.2732
Toll: 1.800.316.9430 I www.acrytecpanel.com

VERTICAL EXPANSION JOINT TYPICAL

D-07