WILLSEAL 600 PRE-COMPRESSED POLYURETHANE FOAM SEALANT

ACRYTEC PANEL SPEC CORROSION COATED STAINLESS STEEL FASTENERS SET BACK MIN. 16mm FROM EDGE OF PANEL

12mm BEAD OF ACRYTEC SPECIFIED ADHESIVE APPLIED TO THE ENTIRE LENGTH OF ACRY CHANNEL

STAINLESS STEEL SELF TAPPING #14 1/4" X 1" INTO Z-GIRT

FLASHING AT BOTTOM OF WALL

ACRYTEC PANEL

18Ga GALVANIZED ACRY CHANNEL VERTICALLY MOUNTED AT 400mm MAX O.C.

LINE OF 18Ga Z-GIRT SPACED 610mm O.C.

MOISTURE BARRIER

25mm DRAINAGE CAVITY

VARIOUS SUBSTRATES

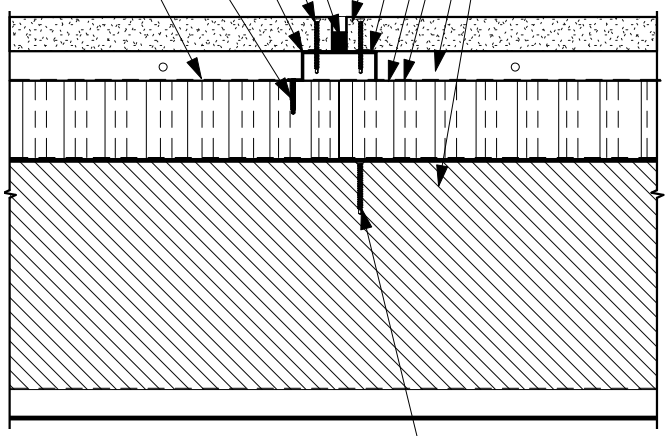

INTERIOR

STAINLESS STEEL ANCHOR (TYPE TO BE DETERMINED BY ENGINEER) FROM Z-GIRT TO SUBSTRATE

Acrytec PANEL INDUSTRIES
40 Gaudaur Road, Unit 1
Woodbridge, Ontario, Canada, L4L 4S6
T: 905.326.3749 I F: 905.326.2732
Toll: 1.800.316.9430 I www.acrytecpanel.com

EXISTING WALL NC-25 INSULATED VERTICAL BUTT JOINT

SCALE: N/A

DS-06