INTERIOR

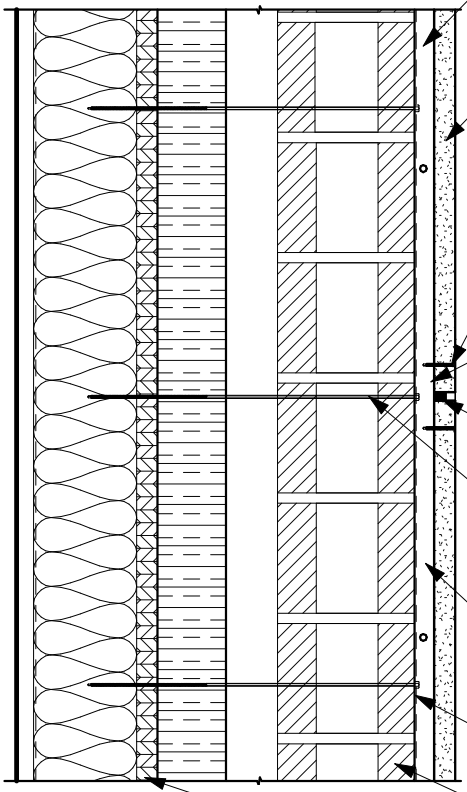

18 Ga GALVANIZED ACRY CHANNEL
VERTICALLY , MOUNTED AT 400mm MAX. O.C.

ACRYTEC PANEL

ACRYTEC PANEL SPEC
CORROSION COATED STAINLESS
STEEL FASTENERS SET BACK
MIN. 16mm FROM EDGE OF PANEL

12mm BEAD OF ACRYTEC SPECIFIED
ADHESIVE APPLIED TO THE ENTIRE
LENGTH OF ACRY CHANNEL

WILLSEAL 600 PRE-COMPRESSED
POLYURETHANE FOAM SEALANT

STAINLESS STEEL ANCHOR
(TYPE TO BE DETERMINED BY ENGINEER)

25mm DRAINAGE CAVITY

MOISTURE BARRIER

BRICK WALL

EXTERIOR SHEATHING

Acrytec PANEL INDUSTRIES
40 Gaudaur Road, Unit 1
Woodbridge, Ontario, Canada, L4L 4S6
T: 905.326.3749 I F: 905.326.2732
Toll: 1.800.316.9430 I www.acrytecpanel.com

EXISTING BRICK WALL HORIZONTAL BUTT JOINT

SCALE: N/A

DS-10