INTERIOR

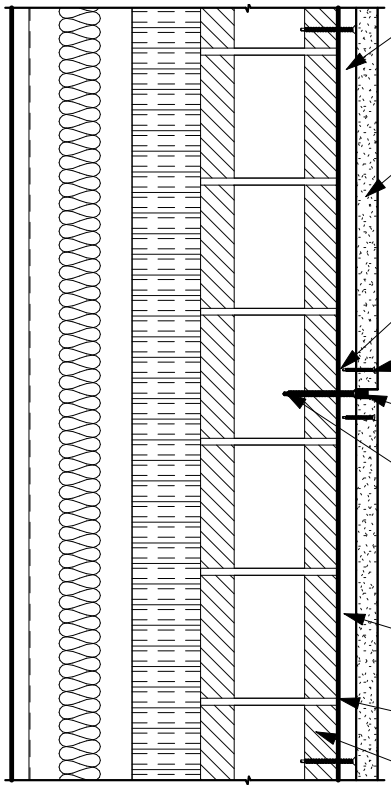

1"X4" WOOD STRAPPING
VERTICALLY MOUNTED
AT 400mm [15.75"] MAX. O.C.

ACRYTEC PANEL

12mm BEAD OF ACRYTEC SPECIFIED
ADHESIVE APPLIED TO THE ENTIRE
LENGTH OF WOOD STRAPPING

ACRYTEC PANEL SPEC
CORROSION COATED STAINLESS
STEEL FASTENERS SET BACK
MIN. 16mm FROM EDGE OF PANEL

WILLSEAL 600 PRE-COMPRESSED
POLYURETHANE FOAM SEALANT

STAINLESS STEEL FASTENER

MIN. 12mm DRAINAGE CAVITY

MOISTURE BARRIER

CONCRETE BLOCK

Acrytec PANEL INDUSTRIES
40 Gaudaur Road, Unit 1
Woodbridge, Ontario, Canada, L4L 4S6
T: 905.326.3749 I F: 905.326.2732
Toll: 1.800.316.9430 I www.acrytecpanel.com

EXISTING WALL CONCRETE
HORIZONTAL BUTT JOINT

SCALE: N/A

DW-09